PIER OF D'NORT

Thank you for purchasing Pier of d'Nort. This guide will help you install and secure your **Auger Pole and Sleeve** safely and effectively. Inside, you'll find step-by-step instructions, diagrams, and important safety information. Please read everything before beginning installation to ensure stability, durability, and long-lasting enjoyment of your pier.

Important Warranty Disclaimer

Use only the components provided with your pier. Any modification or use of non-approved parts may compromise stability and safety and will void the warranty. Improper installation, handling, or use may result in structural failure, personal injury, or property damage.



CAUTION	**The gripper must be in the track correctly. Failure could cause injury or damage.**
CAUTION	**Cincher will damage and leave scratch marks on the auger pole if cincher is not held open while twisting in the auger.**

PIER OF D'NORT

Instructions:

Auger Pole & Sleeve





PARTS INCLUDED:

Description	Qty
Auger Pole	1
Auger Sleeve (Mount)	1

TOOLS: 1/2" Wrench (Not Included)

1/8" Allen Wrench (Not Included)

Jimmy T Bar or Bar for auger pole (Not Included)

Before Starting

Insert the Auger Pole into the Auger Sleeve before attaching to the pier. Auger sleeves should always have the black knob facing up.

PREPARING THE POLE AND SLEEVE

STEP 1: Insert the auger pole into the bottom of the auger sleeve by opening up the cincher with the 1/2" wrench (**picture A**). Pull the pole all the way up into the sleeve until the auger is touching the sleeve (**picture B**).

STEP 2: Loosen the black knob on the sleeve until there is no more tension. Insert the gripper sleeve into the track of the pier and tighten the black knob (**picture C**).







⚠CAUTION **The gripper must be in the track correctly. Failure could cause injury or damage.**


Correct



Incorrect



SECURING DOWN THE AUGER

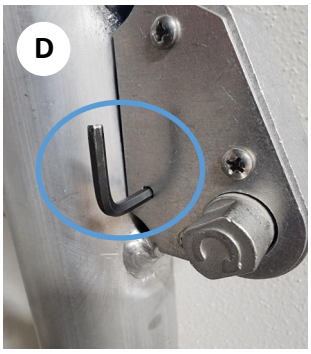



STEP 3: Use the 1/2” wrench to open the cincher and lower the auger until it reaches the ground.

STEP 4: It is recommended but not required to keep the cincher open before securing the auger into the ground. While keeping your cincher open, slide a 1/8” allen wrench through the holes in the cincher plates (**pictures D and E**). This will keep the cincher from compressing onto the auger pole.

⚠CAUTION **Cincher will damage and leave scratch marks on the auger pole if cincher is not held open while twisting in the auger.**



STEP 5: Use our Jimmy T Bar or a bar and slide it through either of the two existing holes in the auger pole and twist down the auger (**picture F**). When the auger is fully secure, pull out the allen wrench, if one was used, and it’s complete.