



Thank you for purchasing Pier of d'Nort. This guide will help you assemble your **Bench** safely and effectively. Inside, you'll find step-by-step instructions, diagrams, and important safety information. Please read everything before beginning installation to ensure stability, durability, and long-lasting enjoyment of your pier.

Important Warranty Disclaimer

Use only the components provided with your pier. Any modification or use of non-approved parts may compromise stability and safety and will void the warranty. Improper installation, handling, or use may result in structural failure, personal injury, or property damage.

DANGER	DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury
WARNING	WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury
CAUTION	CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury
NOTICE	NOTICE is used to address practices not related to physical injury

NOTICE


Do not over tighten the nuts

Instructions:

BENCH ASSEMBLY

PARTS INCLUDED:

Description	Qty
Bench Frame Brackets	3
Bench Backrest Boards (A)	2
Bench Seat Boards (B)	2
1/4" x 2-3/4" Carriage Bolt	24
1/4" Hex Nut	24
1/4" Flat Washer	24

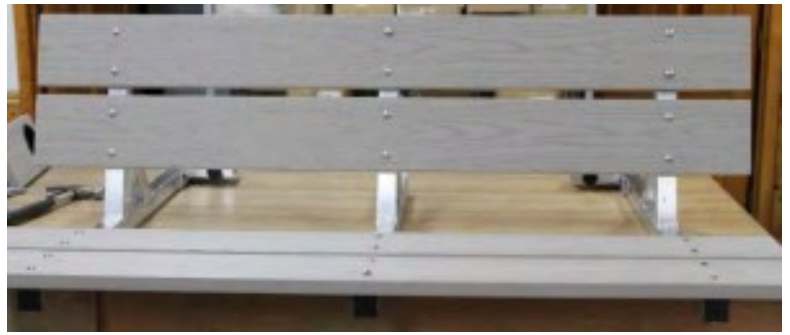

TOOLS: 7/16" Wrench (Not Included)

Before Starting

A flat surface is easiest to work on if available but not necessary.

Cupholder assembly and installation are on your Bench Installation instructions.

ASSEMBLE BACK REST

STEP 1. Line up the 3 bench brackets facing up and flush the ends with the black cap as close as you can.

STEP 2: You will see a sticker with the letter "A" facing up. This is where you'll want to put the letter "A" boards also facing up.

STEP 3: Tap a carriage bolt into the center of one of the holes of the boards, then repeat with the other center hole. This will help line up your boards in the correct position.

STEP 4: Continue with the second letter "A" board.

STEP 5: Place a washer and nut on the back of the bench frame and tighten to where the nut is flush with the frame.



NOTICE Do not over tighten the nuts

STEP 6: Tap the carriage bolts into the outer holes of the bench and repeat step 5 until all carriage bolts are in the "A" boards and nuts are tightened.

ASSEMBLE BENCH SEAT

STEP 7: You will see a sticker with the letter “B” facing up. This is where you’ll want to put the letter “B” boards also facing up.

STEP 8: Tap a carriage bolt into the center of one of the holes of the boards, then repeat with the other center hole. This will help line up your boards in the correct position.

STEP 9: Continue with the second letter “B” board.



STEP 10: Place a washer and nut on the back of the bench frame and tighten to where the nut is flush with the frame.

STEP 11: Tap the carriage bolts into the outer holes of the bench and repeat step 5 until all carriage bolts are in the “B” boards and nuts are tightened.



NOTICE

Do not over tighten the nuts

