



Thank you for purchasing Pier of d'Nort. This guide will help you install and secure your **Giant Muck Pads** safely and effectively. Inside, you'll find step-by-step instructions, diagrams, and important safety information. Please read everything before beginning installation to ensure stability, durability, and long-lasting enjoyment of your pier.

Important Warranty Disclaimer

Use only the components provided with your pier. Any modification or use of non-approved parts may compromise stability and safety and will void the warranty. Improper installation, handling, or use may result in structural failure, personal injury, or property damage.

DANGER	DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury
WARNING	WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury
CAUTION	CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury
NOTICE	NOTICE is used to address practices not related to physical injury

CAUTION	Don't step on the frame being installed or it could sink into the muck. The frame could become very difficult to remove and could cause injury or damage to the pier.
NOTICE	The side of the pad with the rope and the open side of the rubber strips is labeled by "A" stickers (picture D).
CAUTION	Do not drop the frame into the water. There's a high chance the foot pad will detach from the muck pad.
NOTICE	The muck pads will stay on the bottom as the pier section is removed.
CAUTION	Pulling the muck pad out could be difficult for some. Take it slow and work it out.

Instructions:

Giant Muck Pads

PARTS INCLUDED:

Description	Qty
Muck Pads	2
Rubber Strips	4
Extraction Ropes	2
Clips	2

TOOLS: (1) 1/2" Wrench
(Not Included)




Before Starting

Have the Extraction Boom ready to use.

PREPARATION

STEP 1: Using a 1/2" wrench insert the legs into the frame. Use the Extraction Boom to lower the pier section without the muck pads to get the pier as close to level as possible (**picture A**). Adjust the leg height on both sides as needed.

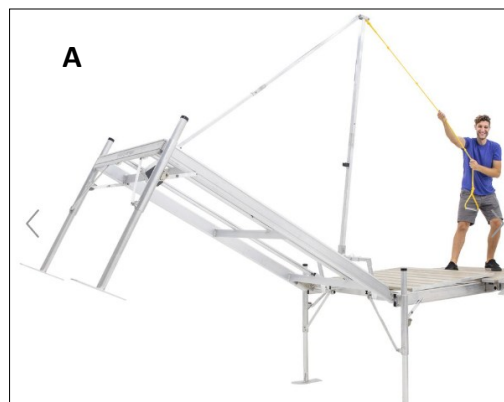


CAUTION

Don't step on the frame being installed or it could sink into the muck. The frame could become very difficult to remove and could cause injury or damage to the pier.

STEP 2: Pull the pier section back up and gently set down until it's resting (**picture B**).

STEP 3: Make leg position marks before lowering the leg. Lowering the leg with a 1/2" wrench allows for easier install of the muck pad (**picture C**) and the marks are there to put the leg back into the correct place once the muck pads are attached.


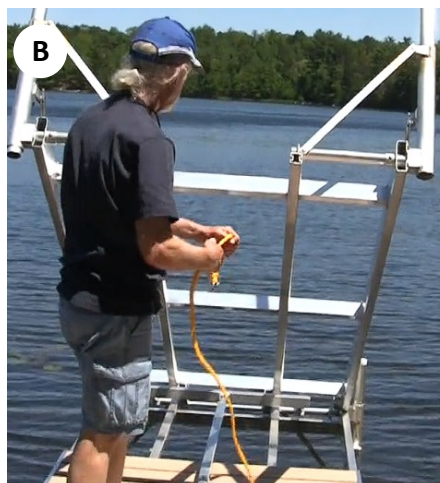


NOTICE

The side of the pad with the rope and the open side of the rubber strips is labeled by "A" stickers (picture D).

SECURING THE MUCK PADS


STEP 4: Two pop rivets are left open. Gently slide the muck pad onto the back of the foot pad (**picture E**) which is the square end of the foot pad.

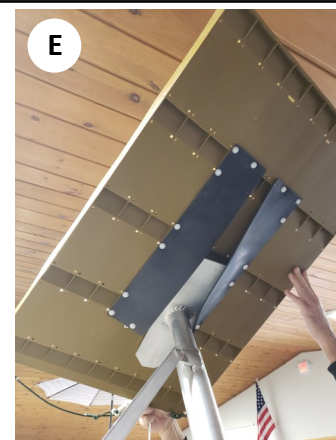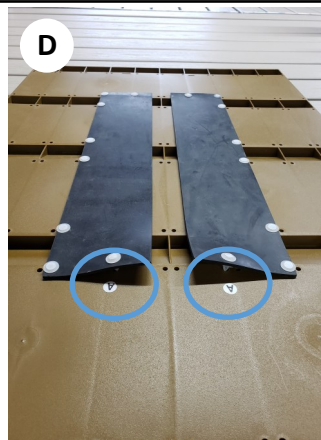

STEP 5: Push in the pop rivets next to the "A" stickers to secure the muck pad (**picture F**).

STEP 6: Unwind the white rope with the clip, loop it around the square part of the leg sleeve (**picture G**).

STEP 7: Using a 1/2" wrench reset the leg to the mark that was made earlier.


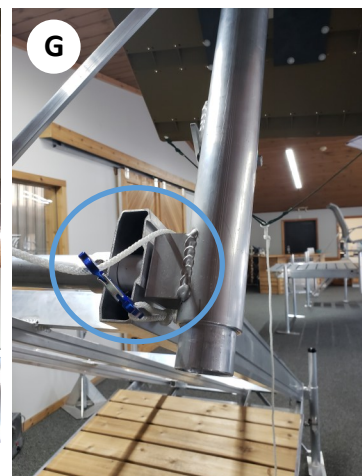


LOWERING THE FRAME

STEP 8: Using the Extraction Boom, slowly lower the frame into the water until it makes contact with the ground (**picture H**). The frame may need to be leveled again.

CAUTION Do not drop the frame into the water.

There's a high chance the foot pad will detach from the muck pad.

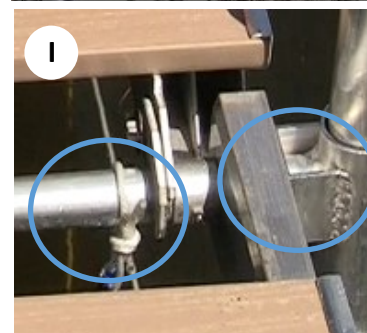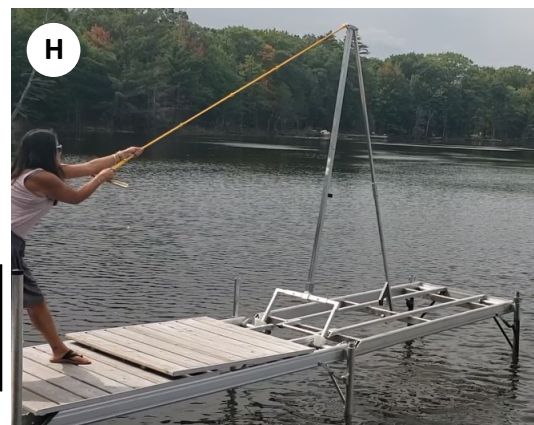


STEP 9: With the panel out of the way undo the clip that is attached to the frame and move it to the previous section (either around the square part of the leg sleeve or the leg sleeve pivot tube to hide it (**picture I**). Set the panel back in place and the muck pad install is complete.


PIER AND MUCK PAD REMOVAL

STEP 10: Remove the panels from the frame being taken out. Use the extraction boom to pull the pier off the muck pads (**picture J**). Gently bring the pier section back until it is resting, fold the legs, and take the frame to shore.

NOTICE The muck pads will stay on the bottom as the pier section is removed.

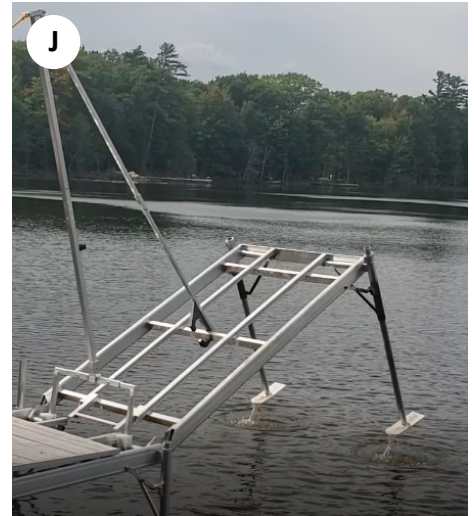

STEP 11: Grab the extraction rope that was clipped onto the previous frame and pull the muck pad out (pictures K, L, and M).

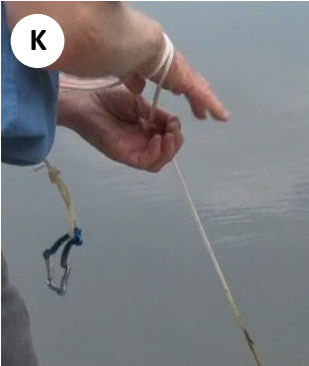

CAUTION Pulling the muck pad out could be difficult for some. Take it slow and work it out.

STEP 12: Dunk the muck pad a few times to get the muck off before storing (**picture N**). Do this for both sides and the removal is complete for that frame. Continue the removal steps until all the muck pads are out.

