



Thank you for purchasing Pier of d'Nort. This guide will help you install and secure your **Gripper Ramp** safely and effectively. Inside, you'll find step-by-step instructions, diagrams, and important safety information. Please read everything before beginning installation to ensure stability, durability, and long-lasting enjoyment of your pier.

Important Warranty Disclaimer

Use only the components provided with your pier. Any modification or use of non-approved parts may compromise stability and safety and will void the warranty. Improper installation, handling, or use may result in structural failure, personal injury, or property damage.

DANGER	DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury
WARNING	WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury
CAUTION	CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury
NOTICE	NOTICE is used to address practices not related to physical injury

CAUTION	Thumb screws must be used!
----------------	----------------------------



Instructions:

GRIPPER RAMP

PARTS INCLUDED:


Description	Qty
Left Gripper (L)	1
Center Gripper (C)	1
Right Gripper (R)	1
Thumb Screws	2

TOOLS: 3/16" Allen Wrench (Included)



Before Starting

Installing the grippers is a lot easier if your starter section is off the ground for your allen wrench. You can also install the grippers before the starter section is installed.

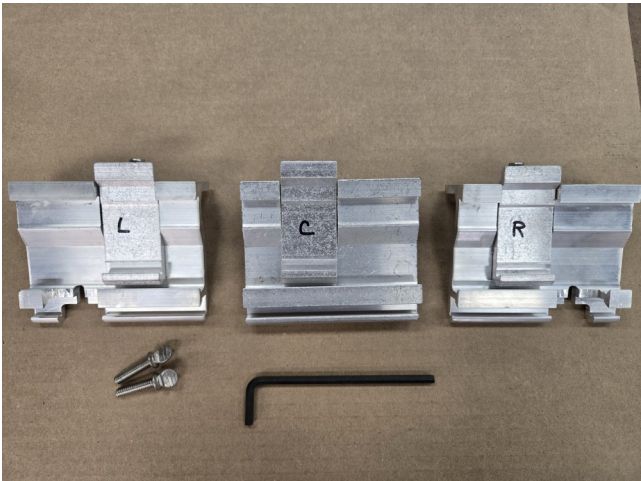

ORIENTING THE RAMP



STEP 1: Place the starter section face up or if installed already, you can prop it up a little bit.

STEP 2: Place the ramp face down on top of the starter section. Have the hinges on the ramp facing the shore and align the sides and the ends to match. (picture A).



STEP 3: Slide the grippers into the top and bottom grooves located on starter section. Grippers are installed with the Allen head set screw facing down (**picture B and C**).

STEP 4: Slide the left and right grippers into it's correct location as it is labeled and line up grippers with the hinge on the ramp and tighten set screw (**picture D and E**).

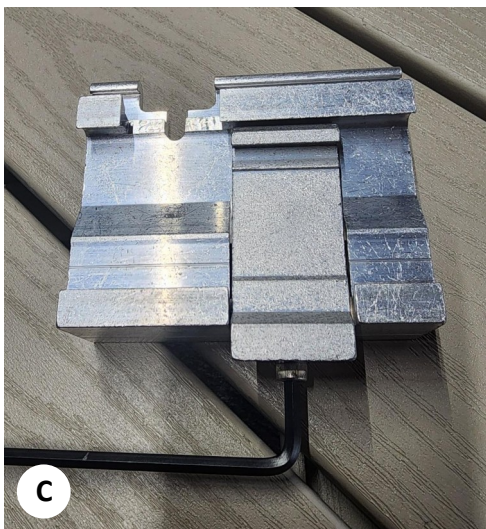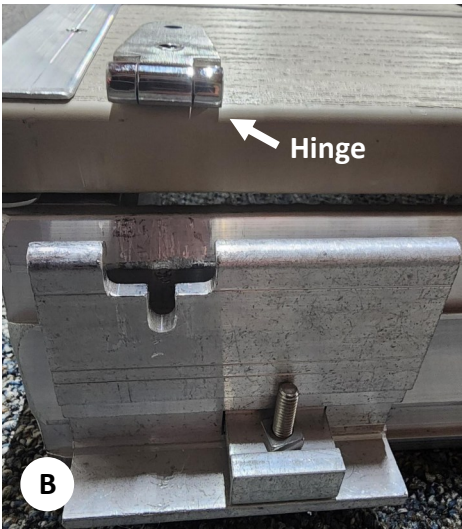

STEP 5: Align the center gripper, it doesn't have an opening for a hinge. Secure it as close to the center as you can and tighten Allen head set screw (**picture E**).



STEP 6: Flip the ramp up so you can insert the hinges into the slots on the left and right grippers. Tighten the thumb screws into the threaded hinge hole. The thumb screw can also be tightened with the ramp down. (**pictures F,G,H,I**)



CAUTION Thumb screws must be used!