



Thank you for purchasing Pier of d’Nort. This guide will help you install and secure your **Panel Clips** safely and effectively. Inside, you’ll find step-by-step instructions, diagrams, and important safety information. Please read everything before beginning installation to ensure stability, durability, and long-lasting enjoyment of your pier.

Important Warranty Disclaimer

Use only the components provided with your pier. Any modification or use of non-approved parts may compromise stability and safety and will void the warranty. Improper installation, handling, or use may result in structural failure, personal injury, or property damage.

DANGER	DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury
WARNING	WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury
CAUTION	CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury
NOTICE	NOTICE is used to address practices not related to physical injury

NOTICE	Panel clips don’t float. Careful not to drop them into deep water.
NOTICE	The tail of the clip is open and can be used to run a cord or for various applications.

Instructions:

Panel Clips

PARTS INCLUDED:

Description	Qty
Panel Clips	4 per panel




Before Starting

If installing the clips see Steps 1-4. If removing the clips see Step 5.

Each panel gets 4 clips. Panel Clips are often called a Seahorse because of their shape.

SPOTS FOR THE CLIPS



STEP 1: See below (picture A). Depending on the pier layout and frame sizes, panel clips should be put in these spots on each panel.

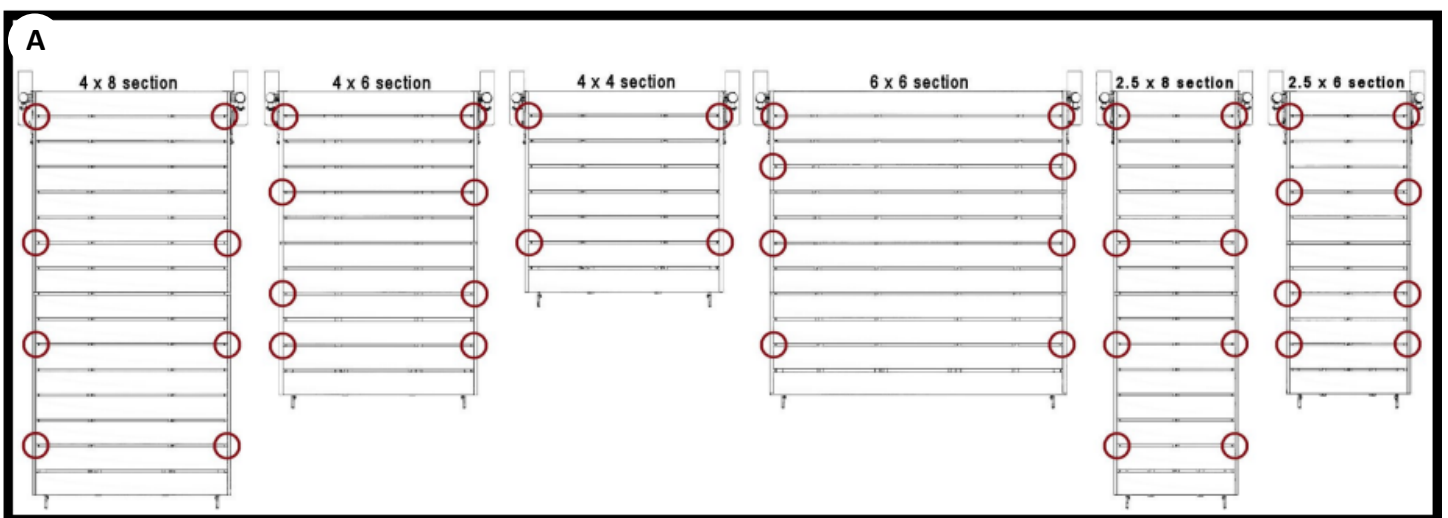


INSTALLING THE CLIPS

STEP 2: Slide a clip in-between the panel with the head facing outward or toward the spar of the frame (**picture B and C**).

NOTICE Panel clips don't float. Careful not to drop them into deep water.

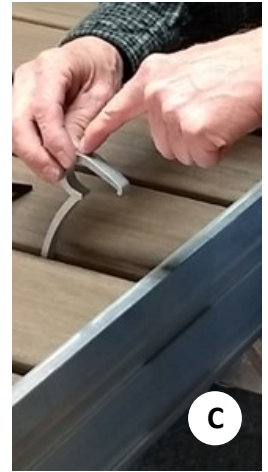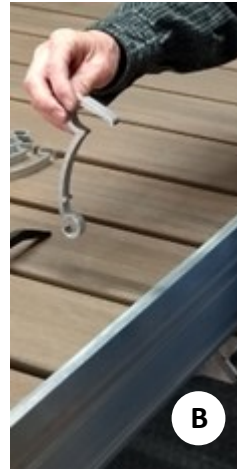

STEP 3: The nose of the clip should be resting on the edge trip of the panel (**picture D**) and the tail or bottom of the clip should be resting on the bottom of the frame (**picture E**).

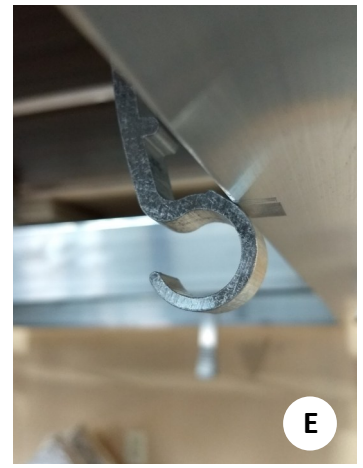

STEP 4: With the clip resting there are multiple ways to secure it: (**picture F**).

- 1) Easiest way is to take another clip in hand, put the tail or bottom on top of the head of the clip resting and push or hit down on top of it. You'll hear and feel the clip snap into place.
- 2) Or reach under the frame and pull the clip until it snaps into place.

NOTICE The tail of the clip is open and can be used to run a cord or for various applications.



REMOVING THE CLIPS

STEP 5: Put one finger on the top of the clip so it doesn't drop. Push or hit the bottom of the clip until it's detached from the frame. Pull the clip up through the panel and store.

There is also a Jimmy T bar available for purchase to remove these clips (**picture G**).

