



Thank you for purchasing Pier of d'Nort. This guide will help you install and secure your **Section Coupler** safely and effectively. Inside, you'll find step-by-step instructions, diagrams, and important safety information. Please read everything before beginning installation to ensure stability, durability, and long-lasting enjoyment of your pier.

Important Warranty Disclaimer


Use only the components provided with your pier. Any modification or use of non-approved parts may compromise stability and safety and will void the warranty. Improper installation, handling, or use may result in structural failure, personal injury, or property damage.

DANGER	DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury
WARNING	WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury
CAUTION	CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury
NOTICE	NOTICE is used to address practices not related to physical injury

NOTICE	Using the 1/2" wrench is optional. Do not overtighten the nut.
NOTICE	You must remove section couplers before removing your pier.
NOTICE	Coupler sits freely in-between sections and does not float if dropped.

Instructions:

Section Coupler

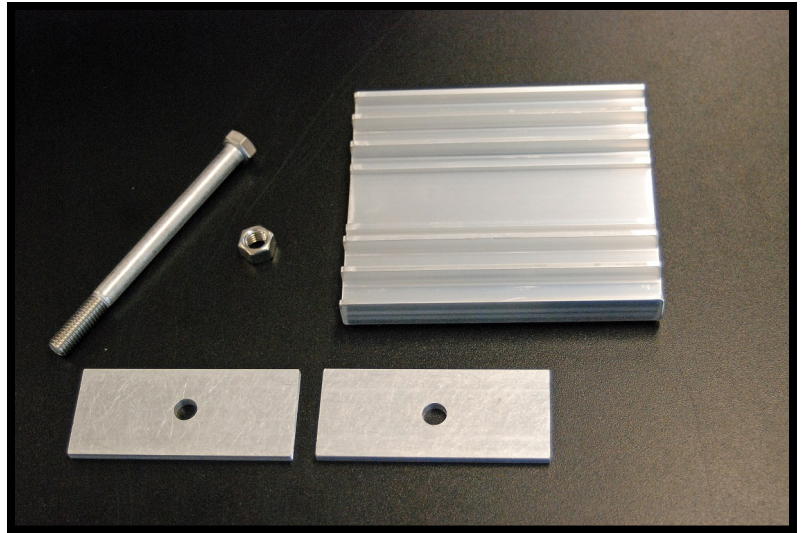

PARTS INCLUDED:

Description	Qty
Coupler	1
Brackets	2

TOOLS: 1/2" Wrench (Not Included)

Before Starting

Align the two sections so that there is a small gap in-between them.



Pull the panels on both sections back a 1/4 of the way so you can see leg holes.

NOTICE	Using the 1/2" wrench is optional. Do not overtighten the nut.
---------------	--

PLACING THE COUPLER

STEP 1: Place the coupler between the two sections being connected. Make sure to clear the leg hole.


STEP 2: Once coupler is in place, squeeze sections together tightly so they grip the coupler. You may need to lift up on the pier section opposite you are standing on.

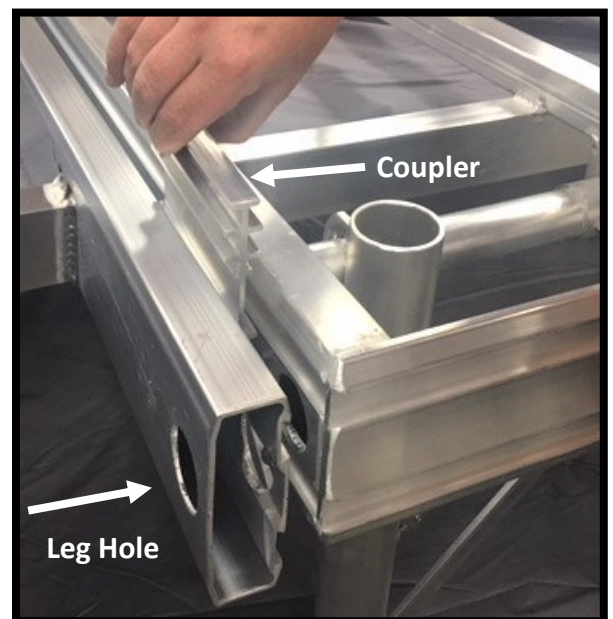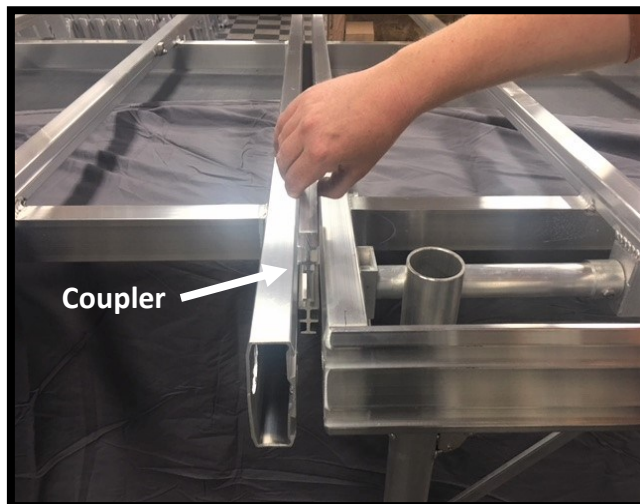

BOLTING COUPLER IN PLACE

STEP 3: Slide one of the brackets from the kit over the bolt, like a washer, and put it through the leg holes of both sections.

STEP 4: Take the other bracket and slide it onto the opposite side of the bolt and thread on the nut. You can then tighten the nut with your hands or a 1/2" wrench.

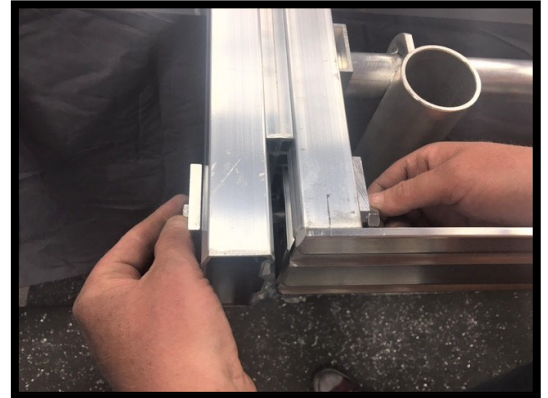

NOTICE

You must remove section couplers before removing your pier.

NOTICE

Coupler sits freely in-between sections and does not float if dropped.

