



Thank you for purchasing Pier of d'Nort. This guide will help you install and secure your **T&L Mount** safely and effectively. Inside, you'll find step-by-step instructions, diagrams, and important safety information. Please read everything before beginning installation to ensure stability, durability, and long-lasting enjoyment of your pier.

Important Warranty Disclaimer

Use only the components provided with your pier. Any modification or use of non-approved parts may compromise stability and safety and will void the warranty. Improper installation, handling, or use may result in structural failure, personal injury, or property damage.

DANGER	DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury
WARNING	WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury
CAUTION	CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury
NOTICE	NOTICE is used to address practices not related to physical injury

CAUTION Wear gloves and safety glasses when cutting legs. Check for sharp edges to debur.
Failure to do so could result in injury or damage.

NOTICE If you loosen too much, you will lose the nut holding the knob.

NOTICE When installing a “Double L” (Two sections side by side) the two T&L MOUNTS should be 5-1/4 inches apart if a section coupler is not used, OR 5-3/8 inches apart if a section coupler is being used.



Instructions:

T&L Mount (All Lengths)

PARTS INCLUDED:

Description	Qty
T&L Mount	1



TOOLS: Pipe Cutter or Band Saw (Not Included)

Before Starting

The pier section getting the T&L Mount attached should be completely level. Black knobs should always be facing up.


PREPARATION BEFORE THE MOUNT

STEP 1: Take a marker and mark on the leg getting cut. The mark should be right above the top of the leg sleeve. Raise up the leg and make the cut right on the mark as flat or level as possible. A pipe cutter works well for this (**picture A**) or a portable band saw. Put the leg back down, level the section, and continue to Step 2.



⚠ CAUTION Wear gloves and safety glasses when cutting legs. Check for sharp edges to debur. Failure to do so could result in injury or damage.



STEP 2: T&L Mount knobs have resistance. Loosen both knobs until the resistance is gone before attaching (**picture B**). They will spin loosely.



NOTICE If you loosen too much, you will lose the nut holding the knob.

INSTALLING THE T&L MOUNT

STEP 3: Nestle the T&L MOUNT grippers into the track on the side of your pier (**picture C**) and one of the grippers in-between the leg sleeve and hinge of the frame. Slide the mount over to butt up to the leg sleeve and leg that was cut earlier (**picture D**).

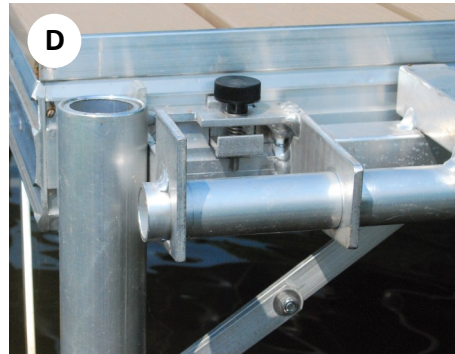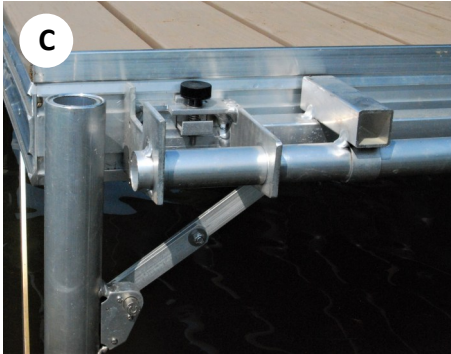

CAUTION

The gripper must be in the track correctly! Failure could cause injury or damage.

Correct



Incorrect



STEP 4: Firmly tighten the black knobs with only your fingers. (No tools necessary)

NOTICE

When installing a “Double L” (Two sections side by side) the two T&L MOUNTS should be 5-1/4 inches apart if a section coupler is not used, OR 5-3/8 inches apart if a section coupler is being used.